


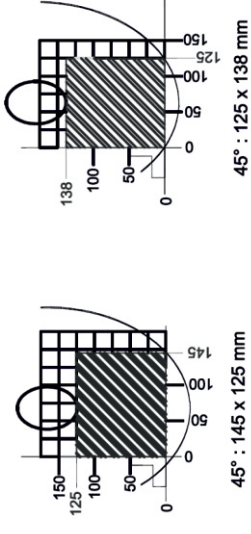


DC 400

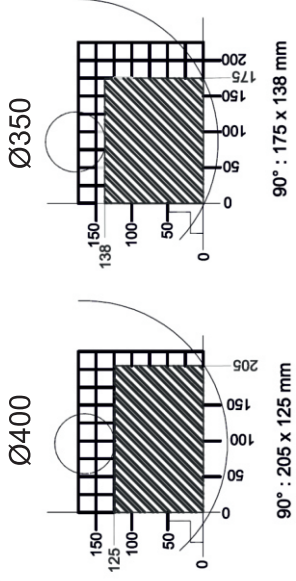

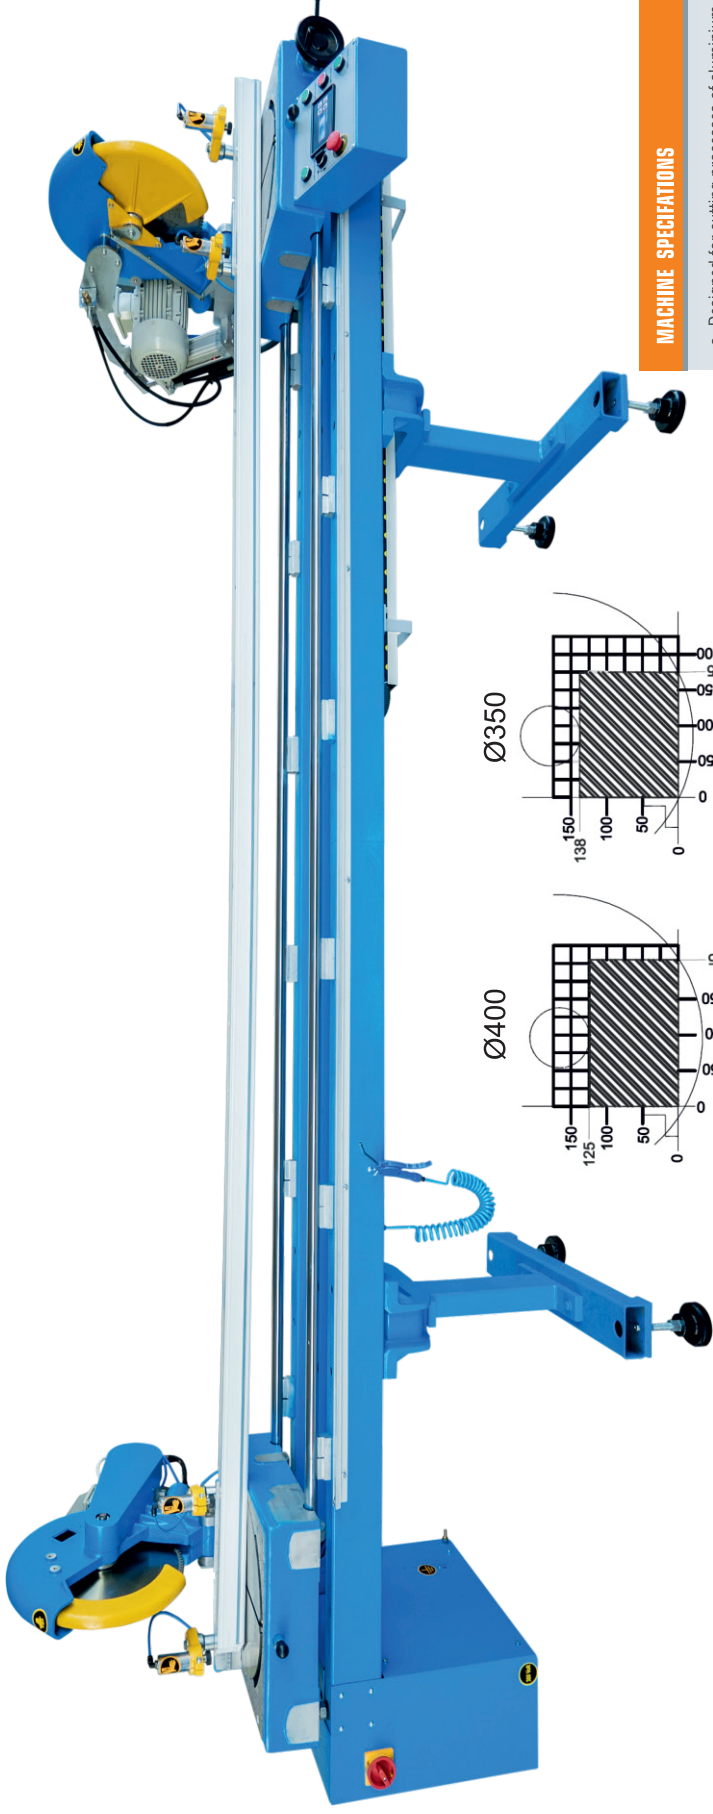

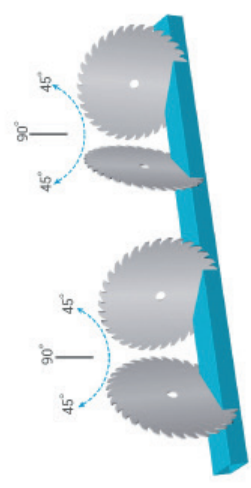



MACHINE SPECIFICATIONS

- Designed for cutting processes of aluminium and plastic profiles
 - Specially alloyed aluminium table, long-lasting electrostatic paint.
 - Automatic cutting.
 - Protection cover with security switch.
 - Cutting feature to left and right at standard 15°-22,5°-30°-45°-90° free
 - Cutting at various angles.
- The ability to accurately set the size of cutting through a digital reading device
- Pneumatic clip of profiles
 - Semi-automatic plate motion in right to left and the exact size of regolirovka profiles manually
 - Designed in accordance with the CE



TECHNICAL DATA

TECHNICAL FEATURES		2.2 KW x 2 400V 50HZ		D=400mm d=32 mm		3000 D/dak. RPM	 <table border="1"> <tr> <td>BAR</td> <td>Hava tüke. Air cons.</td> </tr> <tr> <td>6-8 Bar</td> <td>46 Lt/dak. Lt/min.</td> </tr> </table>	BAR	Hava tüke. Air cons.	6-8 Bar	46 Lt/dak. Lt/min.	 <p>75x410x170 cm</p>	 <p>410 kg</p>
	BAR	Hava tüke. Air cons.											
6-8 Bar	46 Lt/dak. Lt/min.												
DC-400													